



Schedule date		Card Report	
ID	Name	Department	Company
1	Company	Company	Company
4	7411	Company	Company
5	888885	Company	Company
6	Company	Company	Company
7	Company	Company	Company
8	Company	Company	Company
9	Company	Company	Company
10	Company	Company	Company
11	Company	Company	Company
12	Company	Company	Company
13	Company	Company	Company
14	Company	Company	Company
15	Company	Company	Company
16	Company	Company	Company
13000	Lily	Company	Company
13001	Tom	Company	Company
13002	Lact	Company	Company
13003	Linda	Company	Company
13010	Lake	Company	Company
13013	Company	Company	Company
13014	Company	Company	Company
13022	Company	Company	Company
13025	Company	Company	Company



You can use Excel; you can be an excellent workforce management manager!



K30 SSR Fingerprint Time Attendance Terminal

Introduction

K30 is a 2.8-inch TFT screen Time Attendance & Simple Access Control Terminal. It has interfaces for third party electric lock and exit button. TCP/IP and USB Host make data management extremely easy. Most importantly, the built-in backup battery can eliminate the trouble of power-failure. With elegant appearance and reliable quality, you can get the best from it.

Copyright © 2014, ZKTeco Inc. All rights reserved.


ZKTeco may, at any time and without notice, make changes or improvements to the products and services offered and/or cease producing or commercializing them. The ZKSoftware logo and trademark are the property of ZKTeco Inc.



Features:

- TCP/IP, USB -host
- Built-in battery
- Simple access control or external bell
- Multi languages
- SSR report in excel forms

Configuration:

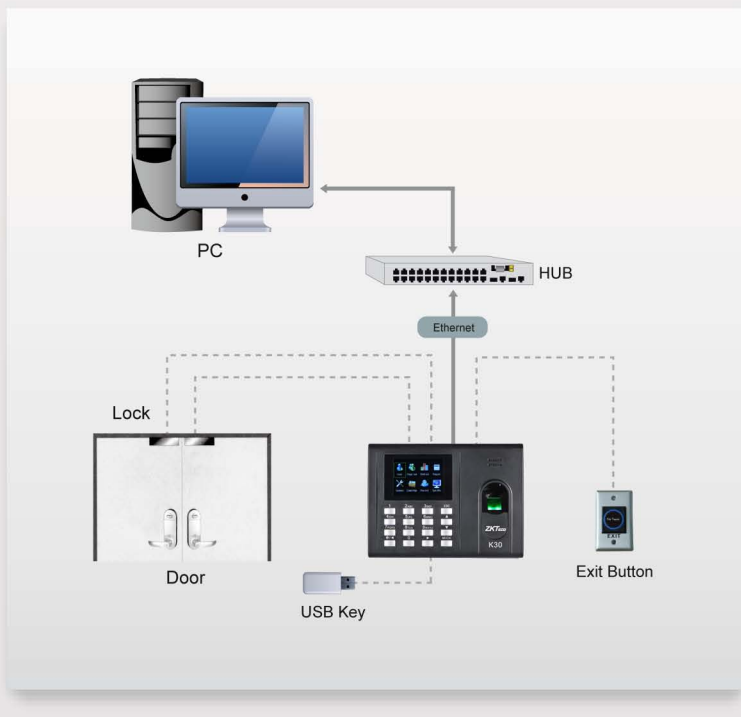

Specifications:

Fingerprint Capacity	1000 (2000 without SSR)
ID Card Capacity	1000 (Optional)
Record Capacity	80,000
Display	2.8-inch TFT Screen
Communication	TCP/IP, USB Host
Standard Functions	Work Code, SMS, DST, Self-Service Query, Automatic Status Switch, Scheduled-bell, T9 Input, 9 Digit User ID, Built-in Battery, Simple Access Control or External Bell
Optional Functions	ID/Mifare
Software	ZKTime5.0
Power Supply	DC 12V 1.5A
Verification Speed	≤0.5 Sec.
Operating Temp.	0°C - 45°C
Operating Humidity	20%-80%
Dimension	184*136*37.6(Length*Width*Thickness)



ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town, Longgang District, Shenzhen China 518129 Tel: +86-755-8960 2345/46/47/48 Fax: +86-755-8960 2675 www.zkteco.com

Global Service Hotline:

USA: + 1 732-412-6007
 Brazil: +55 11-5082-4315
 Mexico: +52-55-5298418
 Dubai: +971 4 6091 310
 Indonesia: +62 21 2921 8949
 Vietnam : +84-0169-5813007
 Russia: +8 915 178-46-81

EU: +34 916532891
 Thailand: +66-29144238
 South Africa: +27 12 259 1047
 India: +91-0124-2623170
 Egypt: +201110444134
 Philippines: +63 9084118832